

# Eclipse P306 and P307 OEM Board

## Experience Multi-Frequency Multi-GNSS RTK

### key features

- Uses GPS, GLONASS, and BeiDou; Galileo and QZSS ready
- 372 Channels
- Long-range RTK baselines
- Compatible with ROX, RTCM, CMR, CMR+ RTK Sources
- COAST and SureTrack maintain sub-meter DGNSS positioning for 40 minutes after correction loss
- Fewer cold starts with Head Start
- Pin compatible with many Hemisphere and other manufacturer's modules



### P306 and P307

Don't compromise; position with RTK accuracy using multiple satellite systems today! Hemisphere GNSS' new Eclipse™ P306™ and P307™ OEM modules use GPS, GLONASS, and BeiDou, and are Galileo and QZSS ready. Track more signals for unparalleled positioning performance even in challenging environments.

Leverage the compact size and easy integration in your design. The 34-pin P306 module is a drop-in upgrade for many Hemisphere products. P307 is a drop-in upgrade for existing designs using standard 20 pin modules from other manufacturers.

### Scalable Eclipse RTK Solutions

With the Eclipse P306 and P307, RTK performance is scalable. Utilize the same centimeter-level accuracy in either single frequency mode, or employ the full performance and fast RTK over long distances with multi-frequency multi-constellation GNSS signals.

### DGPS and SBAS with COAST and SureTrack

Patented COAST™ software enables Hemisphere receivers to utilize previous DGPS and SBAS correction data during times of interference, signal blockage and weak signal. The receiver will coast and continue to maintain sub-meter positioning for up to 40 minutes without any DGPS signal. When your corrections are only for one GNSS constellation, for example GPS using SBAS, Hemisphere's patented SureTrack™ goes to work to model all other satellites, helping maintain an accurate solution in challenging environments.



precision@hemispheregnss.com  
www.hemispheregnss.com

# Eclipse P306 and P307 OEM Boards

## GPS Sensor Specifications

Receiver Type:	GNSS multi-frequency RTK with carrier phase	
Signals Received:	GPS, GLONASS, BeiDou, GALILEO <sup>1</sup> and QZSS <sup>1</sup>	
Channels:	372	
GPS Sensitivity:	-142 dBm	
SBAS Tracking:	3-channel, parallel tracking	
Update Rate:	1 Hz standard, 10 or 20 Hz optional	
Accuracy:	Horizontal (RMS)	Vertical (RMS)
RTK: <sup>2</sup>	10 mm + 1 ppm	20 mm + 2 ppm
SBAS (WAAS): <sup>3</sup>	0.3 m	0.6 m
Autonomous, no SA: <sup>3</sup>	1.2 m	2.5 m
Timing (1PPS) Accuracy:	20 ns	
Cold Start: <sup>4</sup>	< 60 s typical (all unknown)	
Warm Start:	< 30 s typical (no ephemeris)	
Hot Start:	< 10 s typical (all known)	
HeadStart: <sup>5</sup>	Removeable, auto-recharging onboard clock battery	
Maximum Speed:	1,850 kph (999 kts)	
Maximum Altitude:	18,288 m (60,000 ft)	

## Communications

Serial Ports:	4 full-duplex 3.3 V CMOS (3 main serial ports, 1 differential-only port), 1 USB Host <sup>6</sup> , 1 USB Device	
Baud Rates:	4800 - 115200	
Correction I/O Protocol:	Hemisphere GNSS proprietary, ROX Format, RTCM v2.3, RTCM v3.2, CMR, CMR+	
Data I/O Protocol:	NMEA 0183, Crescent binary <sup>7</sup>	
Timing Output:	1PPS, CMOS, active high, rising edge sync, 10 k $\Omega$ , 10 pF load	
Event Marker Input:	CMOS, active low, falling edge sync, 10 k $\Omega$ , 10 pF load	
Power		
Input Voltage:	3.3 VDC +/- 3%	
Power Consumption:	1.5 W nominal L1 GPS 2.3 W nominal dual frequency GPS + GLONASS + BeiDou	
Current Consumption:	455 mA nominal L1 GPS 700 mA nominal dual frequency GPS + GLONASS + BeiDou	
Antenna Voltage:	15 VDC maximum	
Antenna Short Circuit Protection:	Yes	
Antenna Gain Input Range:	10 to 40 dB	
Antenna Input Impedance:	50 $\Omega$	

## Power

Input Voltage:	3.3 VDC +/- 5%
Power Consumption:	< 3.2 W at 3.3 V (L1/L2 GPS/GLONASS/BeiDou) < 3.9 W at 3.3V (L1/L2 GPS/GLONASS/BeiDou; L-Band) < 970 mW at 3.3 V (L1/L2 GPS/GLONASS/BeiDou) < 1180 mA at 3.3V (L1/L2 GPS/GLONASS/BeiDou; L-Band)
Current Consumption:	15 VDC maximum
Antenna Voltage:	15 VDC maximum
Antenna Short Circuit Protection:	Yes
Antenna Gain Input Range:	10 to 40 dB
Antenna Input Impedance:	50 $\Omega$

## Environmental

Operating Temperature:	-40°C to +85°C (-40°F to +185°F)
Storage Temperature:	-40°C to +85°C (-40°F to +185°F)
Humidity:	95% non-condensing (when installed in an enclosure)

## Mechanical

Dimensions:	15.2 L x 7.1 W x 1.6 H (cm) 6.0 L x 2.8 W x 0.63 H (in)
Weight:	.105 kg (3.70 oz.)
Status Indication (LED):	Power, Primary and Secondary GPS lock, Differential lock, DGPS position, Heading, RTK lock, Atlas L-band lock
Power/Data Connector:	
P306:	34-pin male header 0.05" pitch
P307:	20-pin male header 0.05" pitch
Antenna Connectors:	MCX, female, straight

<sup>1</sup> Firmware update required

<sup>2</sup> Depends on multipath environment, number of satellites in view, satellite geometry baseline length (for local services) and ionospheric activity

<sup>3</sup> Depends on multipath environment, number of satellites in view, satellite geometry and ionospheric activity

<sup>4</sup> Cold start means no approx. position, no approx. time, no almanac, no ephemeris

Warm starts require an approx. position, approx. time, and almanac


Hot starts require an approx. position, approx. time, and valid ephemeris

<sup>5</sup> Maintains time while receiver is powered off, reducing cold start occurrences

<sup>6</sup> P306 Only

<sup>7</sup> Hemisphere GNSS proprietary

Authorized Distributor:

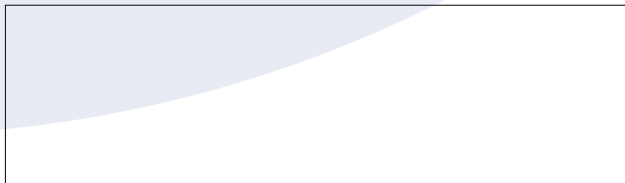

Copyright Hemisphere GNSS, Inc. All rights reserved. Specifications subject to change without notice.

Hemisphere GNSS, Hemisphere GNSS logo, Athena, Atlas, Atlas logo, Eclipse logo, COAST Vector, H321, and L-Dif are trademarks of Hemisphere GNSS.

Rev. 09/15



Hemisphere GNSS, Inc.  
8515 E. Anderson Drive  
Scottsdale, AZ, USA 85255

Toll-Free: +1-855-203-1770  
Phone: +1-480-348-6380  
Fax: +1-480-270-5070  
precision@hgnss.com  
www.hgnss.com